


A comprehensive guide to the Contain-A-Lock® Padlock Protector Shroud - installation and removal of the padlock.

PADLOCK INSTALLATION:

STEP 1: Preparing the Padlock and Carriage

1. Hold the **carriage** so that its **hook** is facing upward.
2. Insert the unlocked padlock into the carriage.

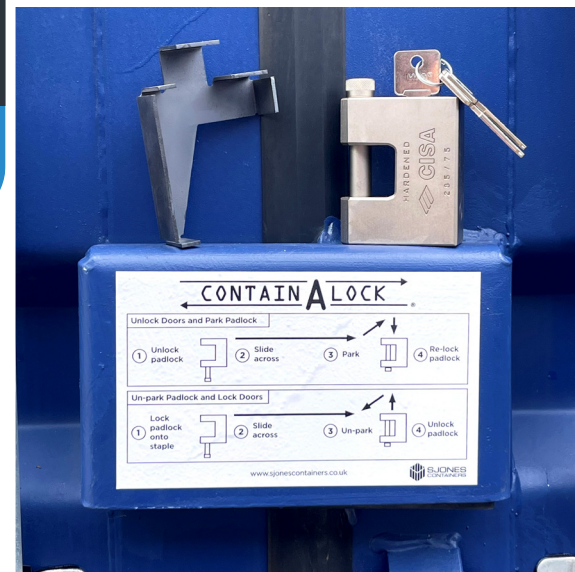


STEP 2: Inserting the Carriage into the Shroud

1. Open the container door that has the welded **shroud** (the lock box).
2. You will need to insert the carriage into the shroud so that it can hang from the **horizontal rail** inside.
3. To do it correctly, hold the carriage with the padlock facing you.

Inside the shroud:

Horizontal rail:
Keeps your padlock secure in the shroud when doors are open.

Metal lip

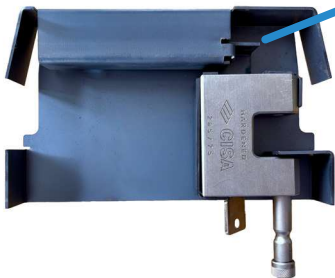


Did you know?

We also have a video to walk you through the entire process! Click the play button on the right or access it here: https://www.youtube.com/watch?v=t4kWXT_TdjA



4. Insert the carriage into the shroud and slide it to the right.

5. Ensure the **metal lip** is positioned inside the inner U-bend of the padlock.

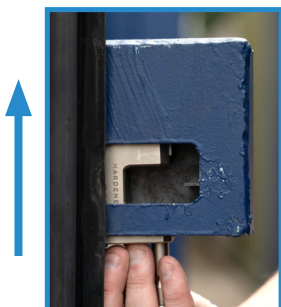

6. With the padlock in place, lift it fully, then slide to the left until the hook catches the rail.

7. Test by sliding the padlock side-to-side. If it moves freely, it's correctly installed.



STEP 3: Locking the Container Door

1. With the padlock hanging from the rail, close the container door.
2. From underneath, slide the padlock toward the **staple**.
3. Push the locking pin through the staple and lock the padlock.



Staple: A small, U-shaped metal fitting attached to a container door, designed for a padlock to pass through in order to secure and lock the container.



PADLOCK REMOVAL:

STEP 1: Opening the Container Door

While the Contain-A-Lock® Padlock Protector Shroud is designed to keep the padlock on the rail when the container doors are open, the steps below show how to remove it if needed.

1. Unlock the **padlock** and pull down the **locking pin**.
2. While facing the front of the **shroud**, slide the padlock to the right, away from the staple.
3. Open the container door with the shroud welded onto it.

STEP 2: Removing the Padlock

1. Now, facing the back of the shroud, slide the padlock to the right toward the **metal lip** until you feel the hook release from the rail.
2. Pull the padlock down until the top of its inner U-bend is stopped by the metal lip.
3. Move the padlock slightly up and to the left, and you should now be able to pull it down freely.



Protect What Matters

Corrosion-resistant, tamper-proof, and easy to use, the Contain-A-Lock® Padlock Protector Shroud keeps your container contents safe. It's the ideal solution for enhancing container security, particularly at external self storage sites, where multiple users have access.

Contact our team today and enjoy the peace of mind that comes with knowing your valuables are securely locked away.